


Plan and Concept © Adventure Playgrounds Pty. Ltd. 2015

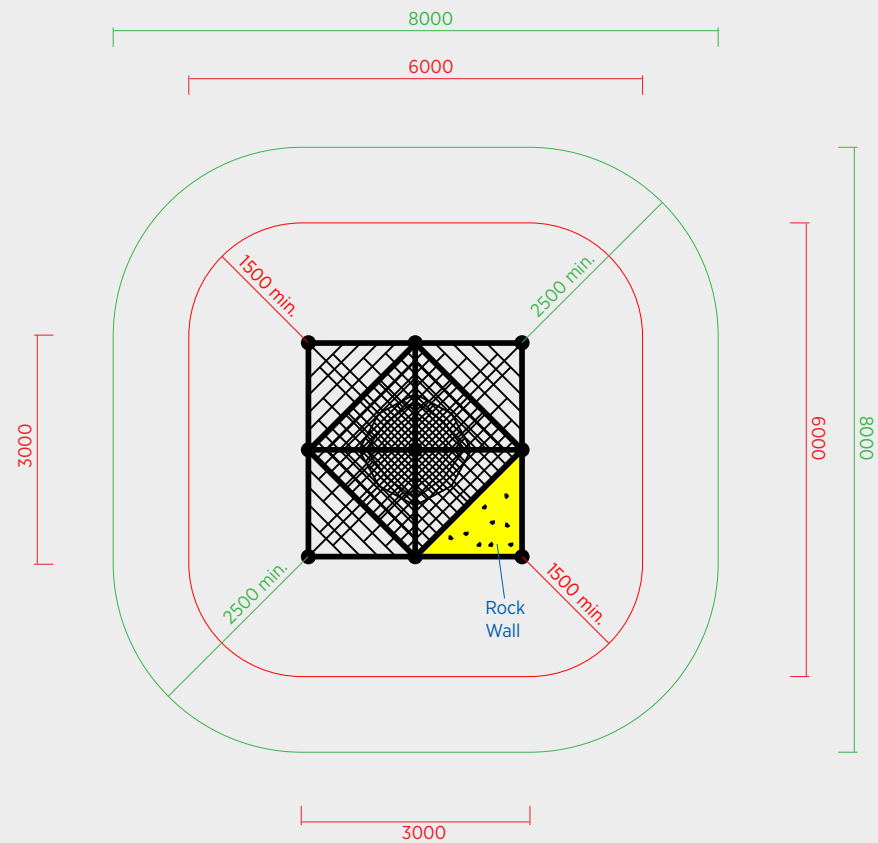

SCALE 1:100

• Provide undersurfacing in accordance with AS/NZS 4422:1996. Mulch undersurfacing should be 200mm minimum compacted depth.

• Plans and illustrations are schematic only, actual details may vary. Do not scale for dimensions. Allow 5% minimum additional clearance for site variations.

• Falling Space:

— Minimum impact area as per AS4685-2014 — Required free space as per AS4685-2014
 — Victorian Dept. of Education minimum - - - Recommended clearance area