


- Provide undersurfacing in accordance with AS 4422:2016. Mulch undersurfacing should be 200mm minimum compacted depth.
- Plans and illustrations are schematic only, actual details may vary. Do not scale for dimensions. Allow 5% minimum additional clearance for site variations.
- FHO - Free Height Of Fall as per AS 4685:2021
- GC - Ground Clearance under swing attachments used to calculate impact area, free space and FHO
- Falling Space:



Please Note:

Ground clearance under this carousel must be 60-110mm. Unitary surfacing is recommended to ensure this is maintained.

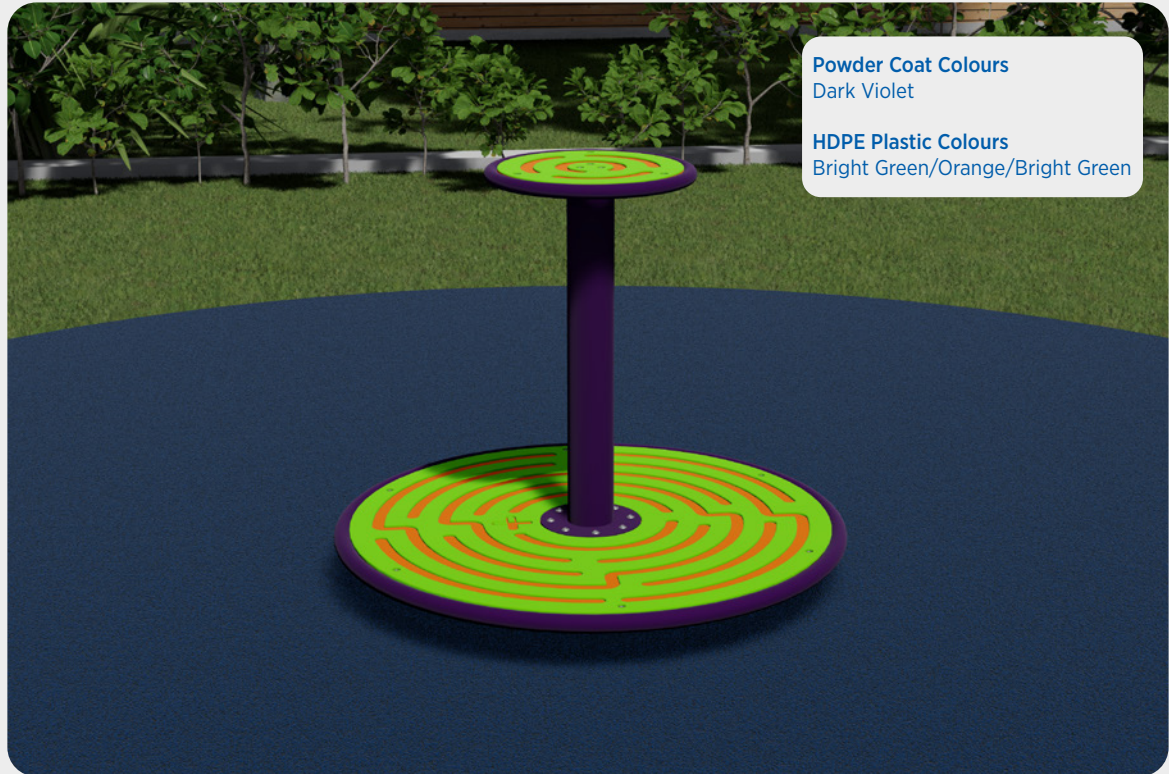

Powder Coat Colours
Dark Violet

HDPE Plastic Colours
Bright Green/Orange/Bright Green

