




- Colours**
- Powder Coat**
 - Deep Pool
 - Intensity Flame
 - Intensity Moonlight
 - Corrugated Sheet**
 - N/A
 - Timber**
 - N/A
 - HDPE Plastic**
 - Red/Yellow/Red
 - Yellow/Red/Yellow
 - Wire Rope**
 - N/A
 - Fibreglass Slide**
 - Canary Yellow
 - Rotomoulded Plastic**
 - N/A

 **Made in Australia**

Plan and Concept © Adventure Playgrounds Pty. Ltd. 2023. Illustration of equipment only. The actual details may vary.

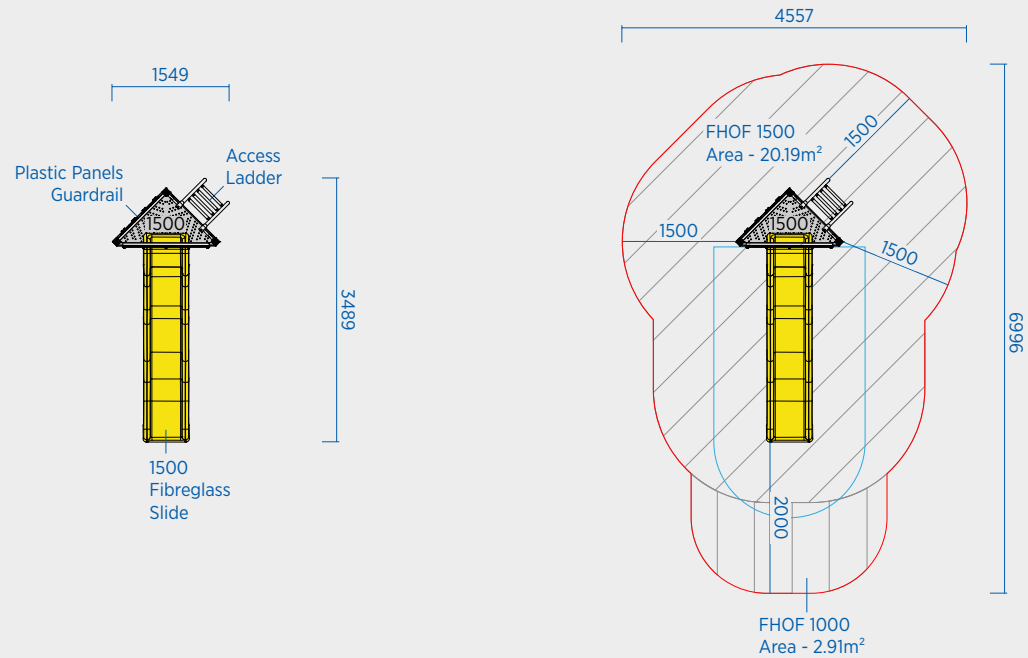

SCALE
1:100

- Provide undersurfacing in accordance with AS 4422:2016. Mulch undersurfacing should be 200mm minimum compacted depth.
- Plans and illustrations are schematic only, actual details may vary. Do not scale for dimensions. Allow 5% minimum additional clearance for site variations.
- FHOF - Free Height Of Fall as per AS 4685:2021
- GC - Ground Clearance under swing attachments used to calculate impact area, free space and FHOF
- Falling Space:

	Minimum impact area as per AS 4685:2021		Required free space as per AS 4685:2021
	Recommended clearance area		Circulation space as per AS 4685:2021