



Colours

Powder Coat
 Deep Pool
 APO Grey
 Intensity Reef

Corrugated Sheet
 N/A


Timber
 N/A

HDPE Plastic
 Blue/Yellow/Blue
 Grey/White/Grey


Wire Rope
 N/A

Fibreglass Slide
 Seagull Grey

Rotomoulded Plastic
 N/A



Plan and Concept © Adventure Playgrounds Pty. Ltd. 2015. All rights reserved. No part of this publication may be reproduced without prior written permission.

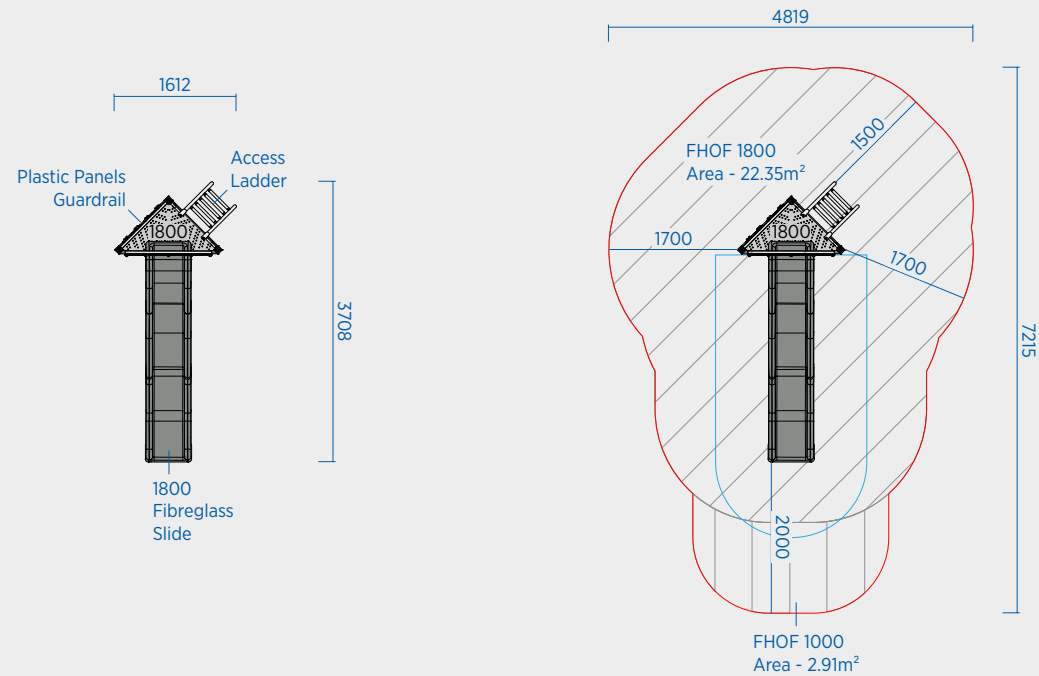

SCALE
1:100

- Provide undersurfacing in accordance with AS 4422:2016. Mulch undersurfacing should be 200mm minimum compacted depth.
- Plans and illustrations are schematic only, actual details may vary. Do not scale for dimensions. Allow 5% minimum additional clearance for site variations.
- FHOF - Free Height Of Fall as per AS 4685:2021
- GC - Ground Clearance under swing attachments used to calculate impact area, free space and FHOF
- Falling Space:

	Minimum impact area as per AS 4685:2021		Required free space as per AS 4685:2021
	Recommended clearance area		Circulation space as per AS 4685:2021