



Colours

Powder Coat
 Berry Grey
 Hawthorn Green
 Intensity Summer
 Intensity Juicy Lime

Corrugated Sheet
 N/A

Timber
 N/A

HDPE Plastic
 Bright Green/Orange/Bright Green
 Green/Beige/Green

Wire Rope
 Acid Green



Rotomoulded Plastic
 Caulfield Green
 Plasco Green

 **Made in Australia**



 Made in Australia



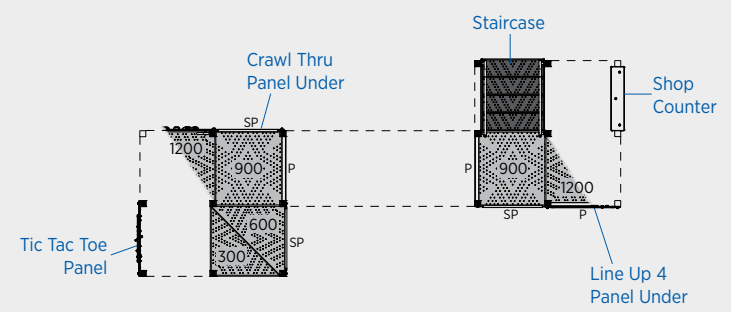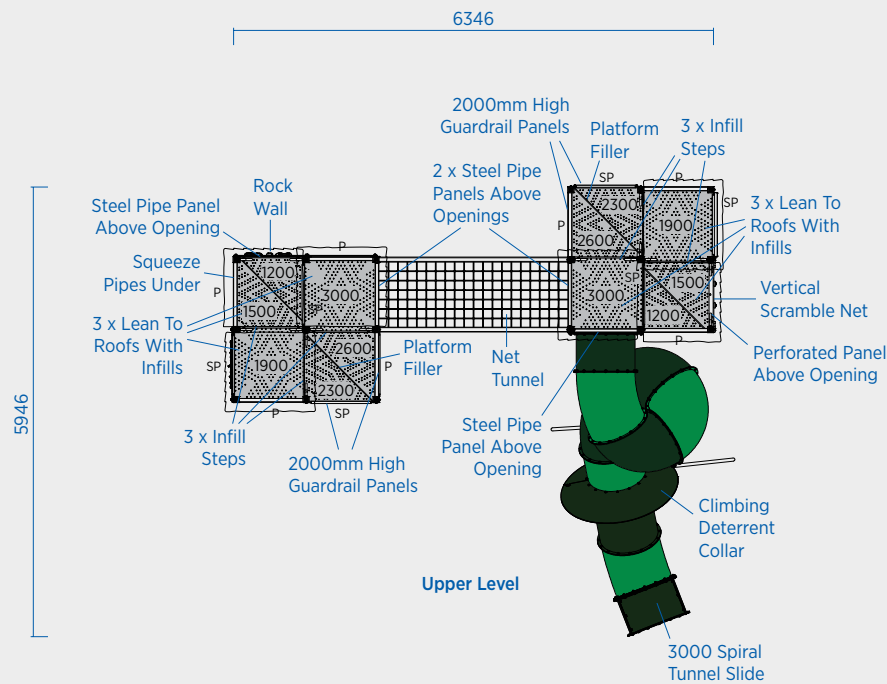


SCALE 1:100 0 1 2 3 4

Plans and illustrations are schematic only, actual detail may vary.
Do not scale for dimensions. Allow 5% minimum additional clearance for site variations.

SP Steel Pipe Panel

P Perforated Steel Panel

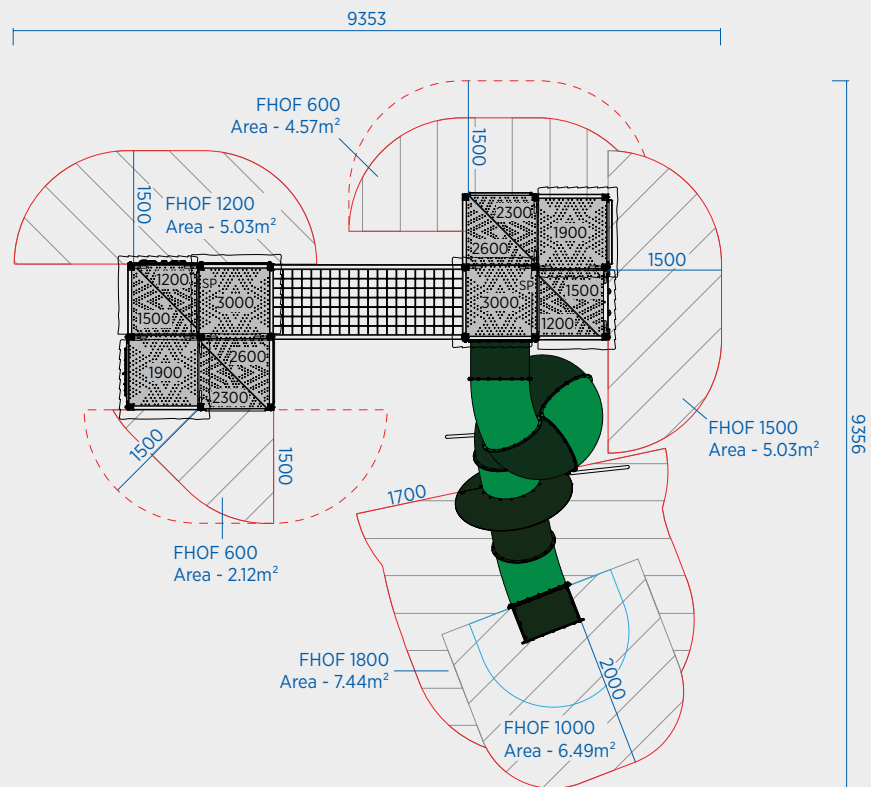

- Provide undersurfacing in accordance with AS 4422:2016. Mulch undersurfacing should be 200mm minimum compacted depth.

- Plans and illustrations are schematic only, actual details may vary. Do not scale for dimensions. Allow 5% minimum additional clearance for site variations.

- FHOF - Free Height Of Fall as per AS 4685:2021

- GC - Ground Clearance under swing attachments used to calculate impact area, free space and FHOF

- Falling Space:

Minimum impact area as per AS 4685:2021

Required free space as per AS 4685:2021

Recommended clearance area

Circulation space as per AS 4685:2021