


SCALE 1:100

- Provide undersurfacing in accordance with AS 4422:2016. Mulch undersurfacing should be 200mm minimum compacted depth.
- Plans and illustrations are schematic only, actual details may vary. Do not scale for dimensions. Allow 5% minimum additional clearance for site variations.
- FHOFF - Free Height Of Fall as per AS 4685:2021
- GC - Ground Clearance under swing attachments used to calculate impact area, free space and FHOFF
- Falling Space:

Minimum impact area as per AS 4685:2021	Required free space as per AS 4685:2021
Recommended clearance area	Circulation space as per AS 4685:2021

*FHOFF Varies according to overall mound height

Please Note: Mound construction and undersurfacing is not included in the Mound Tunnel price unless specifically detailed

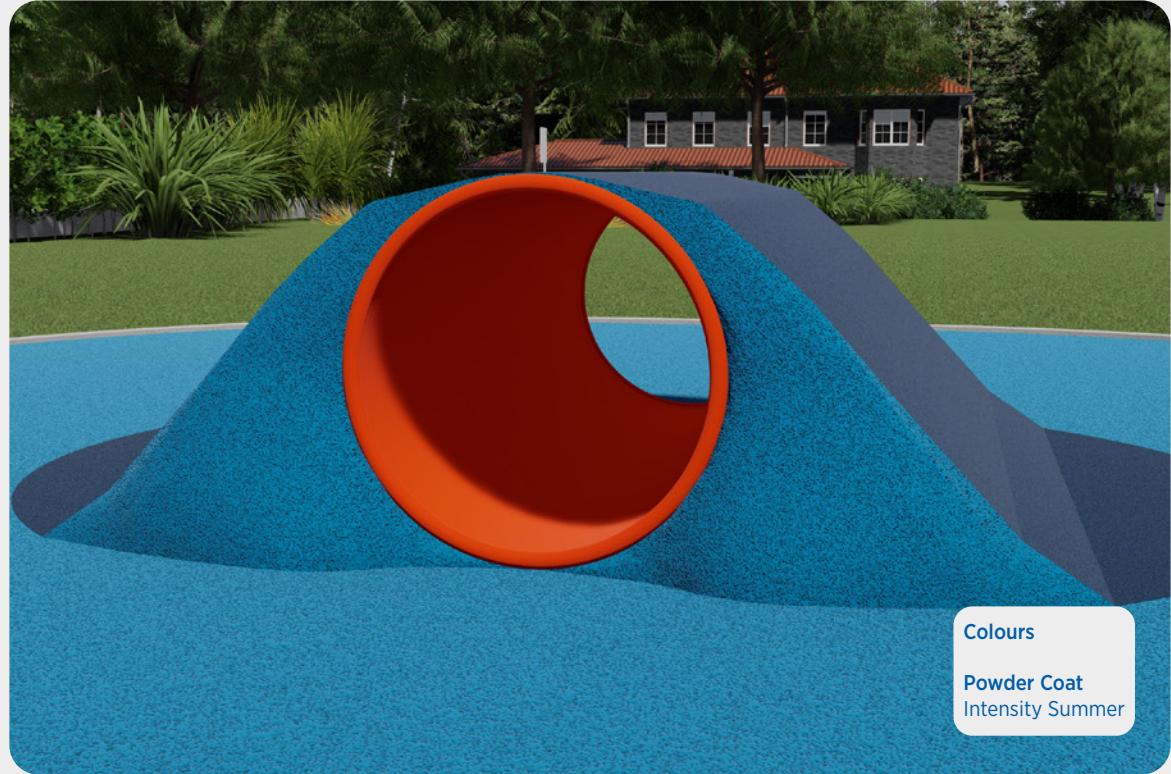

Colours
Powder Coat
Intensity Summer

Made in Australia

Plan and Concept © Adventure Playgrounds Pty. Ltd. 2023. Illustrations are schematic only, actual details may vary.