


SCALE  
1:100

- Provide undersurfacing in accordance with AS 4422:2016. Mulch undersurfacing should be 200mm minimum compacted depth.
- Plans and illustrations are schematic only, actual details may vary. Do not scale for dimensions. Allow 5% minimum additional clearance for site variations.
- FHOFF - Free Height Of Fall as per AS 4685:2021
- GC - Ground Clearance under swing attachments used to calculate impact area, free space and FHOFF
- Falling Space:
  - Minimum impact area as per AS 4685:2021
  - Required free space as per AS 4685:2021
  - - - Recommended clearance area
  - - - Circulation space as per AS 4685:2021

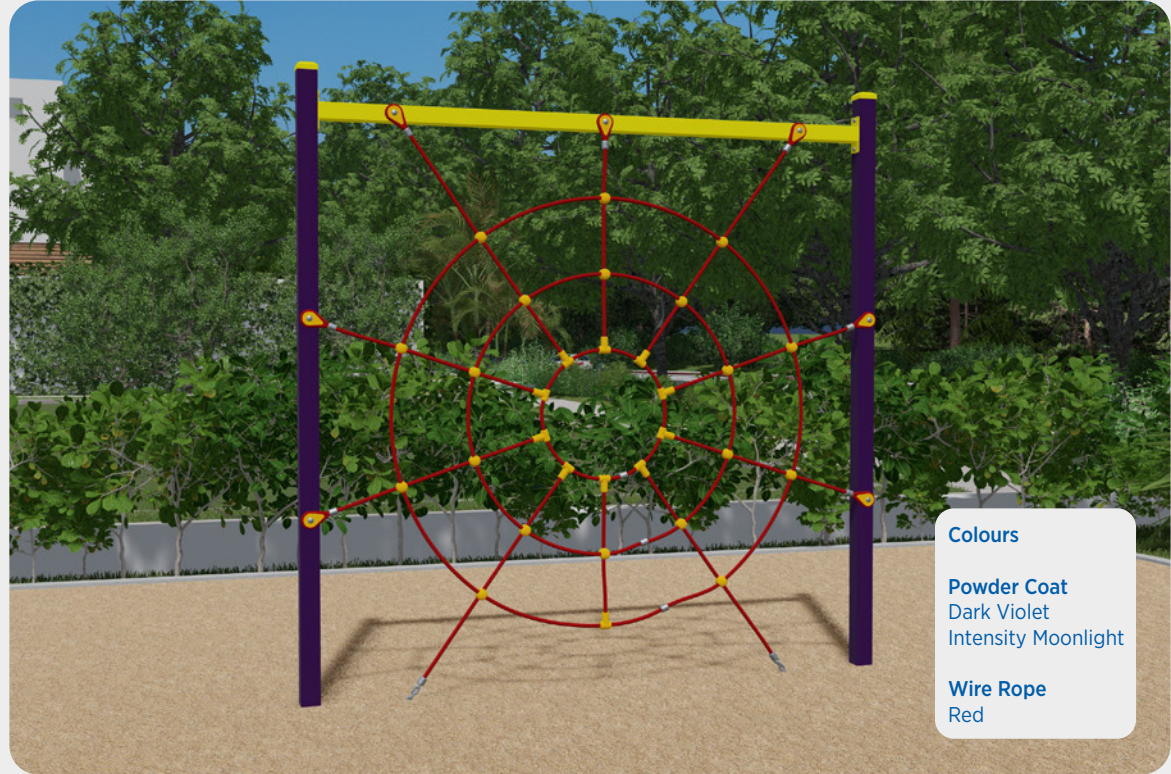

**Colours**

**Powder Coat**  
Dark Violet  
Intensity Moonlight

**Wire Rope**  
Red

**Made in Australia**

Plan and Concept © Adventure Playgrounds Pty. Ltd. 2023. Illustrations are schematic only, actual details may vary.