


SCALE 1:100

- Provide undersurfacing in accordance with AS 4422:2016. Mulch undersurfacing should be 200mm minimum compacted depth.
- Plans and illustrations are schematic only, actual details may vary. Do not scale for dimensions. Allow 5% minimum additional clearance for site variations.
- FHO - Free Height Of Fall as per AS 4685:2021
- GC - Ground Clearance under swing attachments used to calculate impact area, free space and FHO
- Falling Space:
 

	Minimum impact area as per AS 4685:2021		Required free space as per AS 4685:2021
	Recommended clearance area		Circulation space as per AS 4685:2021

**Please Note:**

Agricultural drainage will be provided from base to edge of Galaxy only, and the cost of connection to a suitable discharge system is not included in prices unless specifically detailed.

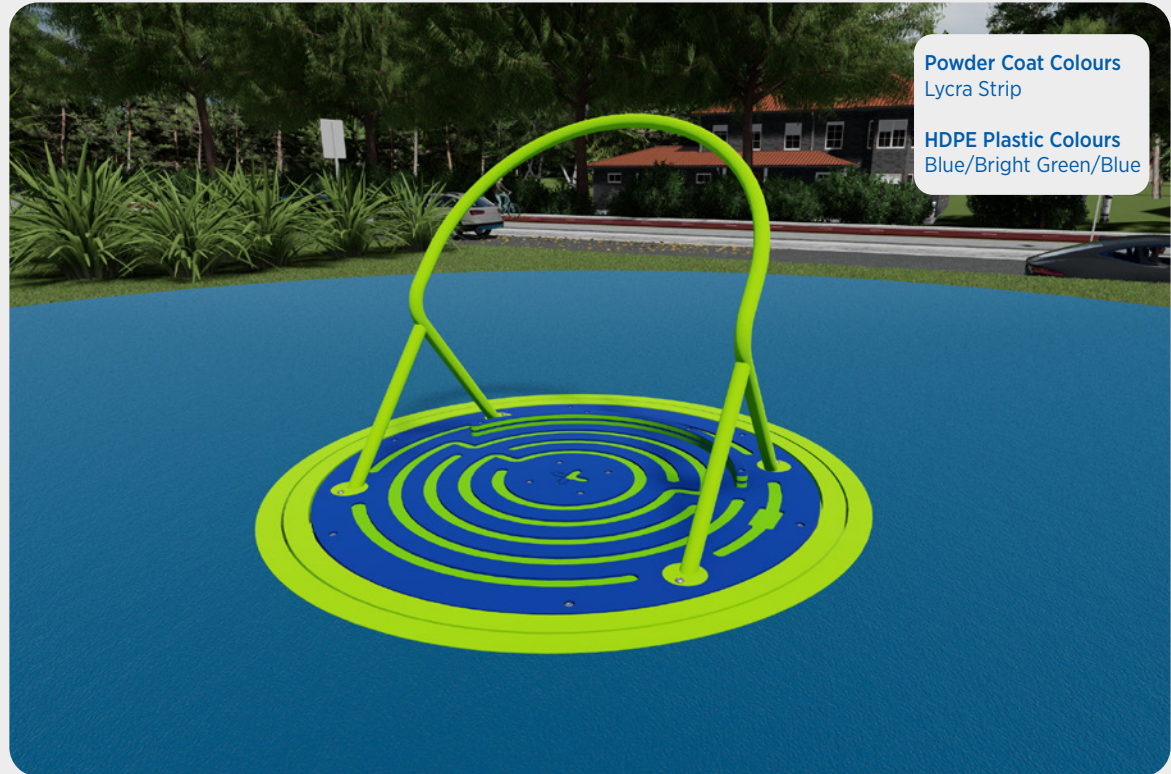

**Powder Coat Colours**  
Lyra Strip

**HDPE Plastic Colours**  
Blue/Bright Green/Blue

**Made in Australia**

Plan and Concept © Adventure Playgrounds Pty. Ltd. 2022. Illustrations are schematic only, actual details may vary.