

**Colours**


**Main Frame**  
Red RAL 3000

**Joiners**  
Yellow RAL 1021

**Wire Rope**  
Blue  
Yellow

© Adventure Playgrounds Pty. Ltd. 2022. Illustrations are conceptual only. Actual details may vary.



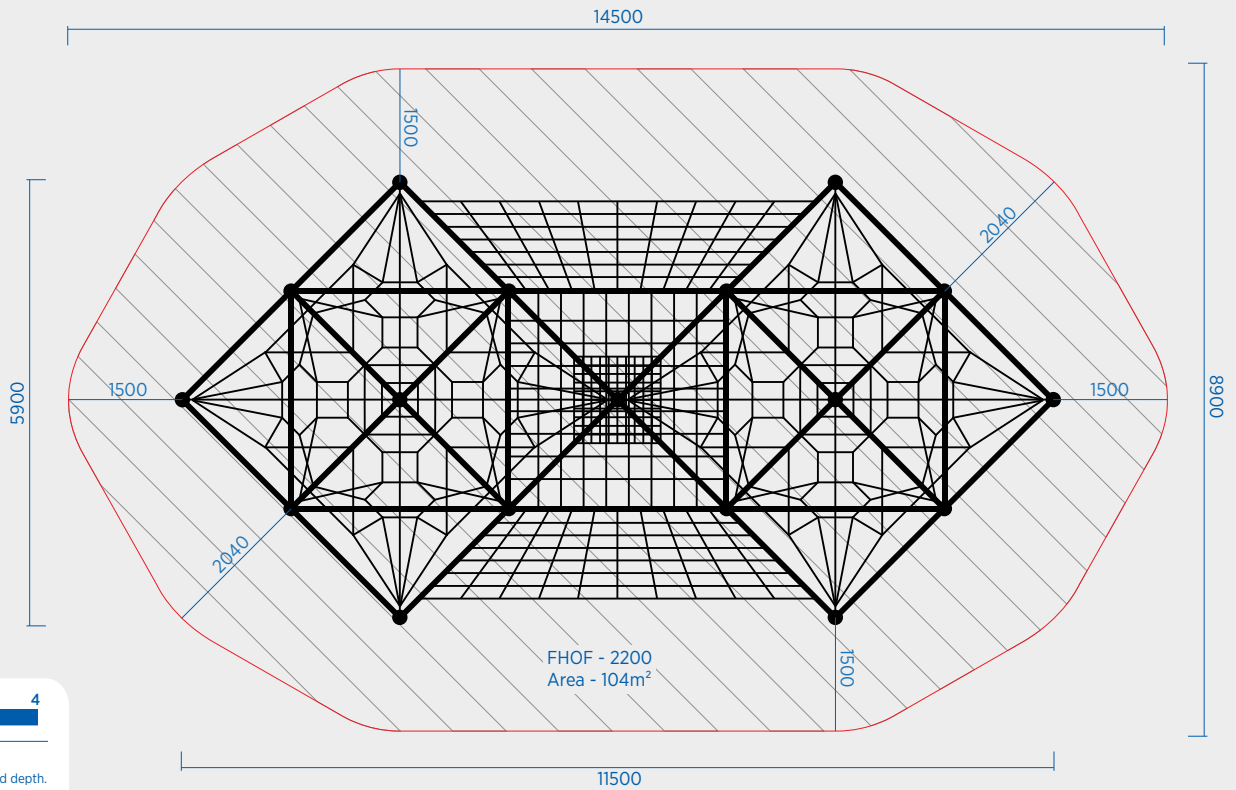

SCALE 0 1 2 3 4  
1:100

- Provide undersurfacing in accordance with AS 4422:2016. Mulch undersurfacing should be 200mm minimum compacted depth.
- Plans and illustrations are schematic only, actual details may vary. Do not scale for dimensions. Allow 5% minimum additional clearance for site variations.
- FHOF - Free Height Of Fall as per AS 4685:2021
- GC - Ground Clearance under swing attachments used to calculate impact area, free space and FHOF
- Falling Space:
  - Minimum impact area as per AS 4685:2021
  - Required free space as per AS 4685:2021
  - - - Recommended clearance area
  - - - Circulation space as per AS 4685:2021