

Free Space Cannot Be Overlapped By An Impact Area Unless Directly Abutting Another Trampoline For Use In A Cluster


SCALE 1:100

- Provide undersurfacing in accordance with AS 4422:2016. Mulch undersurfacing should be 200mm minimum compacted depth.
- Plans and illustrations are schematic only, actual details may vary. Do not scale for dimensions. Allow 5% minimum additional clearance for site variations.
- FHOF - Free Height Of Fall as per AS 4685:2021
- GC - Ground Clearance under swing attachments used to calculate impact area, free space and FHOF
- Falling Space:
  - Minimum impact area as per AS 4685:2021
  - Required free space as per AS 4685:2021
  - Recommended clearance area
  - Circulation space as per AS 4685:2021

Please Note:

Agricultural drainage will be provided from base to edge of Trampoline only, and the cost of connection to a suitable discharge system is not included in prices unless specifically detailed.

Rubber undersurfacing is not included in the Trampoline price unless specifically detailed.

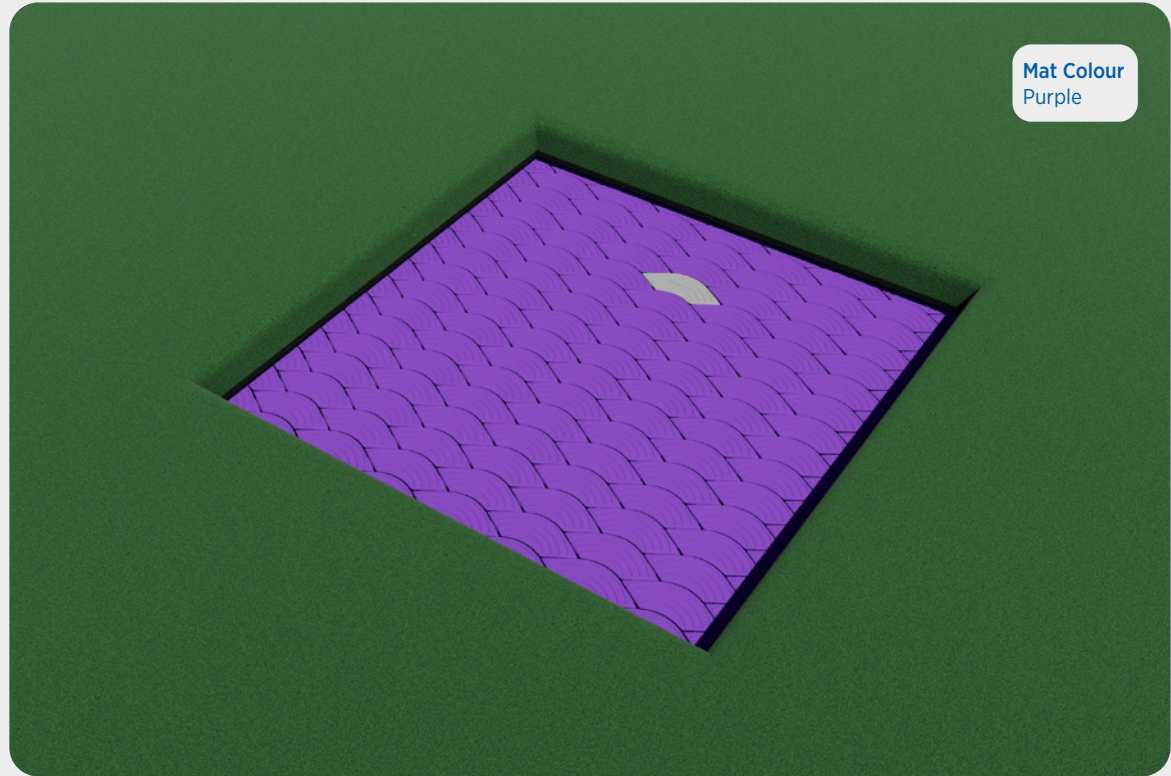

Made in Australia

Plan and Concept © Adventure Playgrounds Pty. Ltd. 2023. Illustrations are schematic only, actual details may vary.