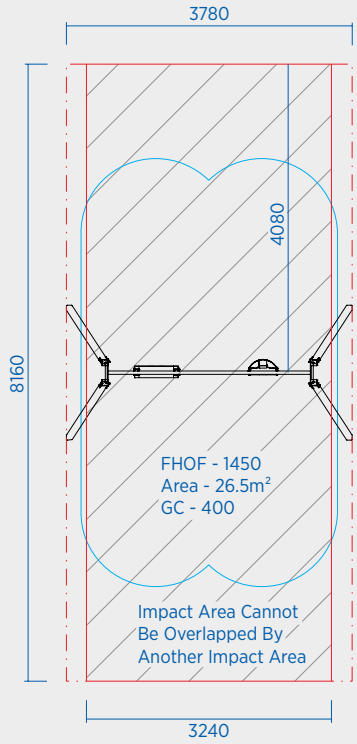

SCALE 1:100 0 1 2 3 4

- Provide undersurfacing in accordance with AS 4422 (Int.):2022. Mulch undersurfacing should be 200mm minimum compacted depth.
- Plans and illustrations are schematic only, actual details may vary. Do not scale for dimensions. Allow 5% minimum additional clearance for site variations.
- FHOF - Free Height Of Fall as per AS 4685:2021
- GC - Ground Clearance under swing attachments used to calculate impact area, free space and FHOF
- Falling Space:
  - Minimum impact area as per AS 4685:2021
  - Required free space as per AS 4685:2021
  - Recommended clearance area
  - Circulation space as per AS 4685:2021

Materials

Main Uprights
- ● 75 x 75 Galvanised Steel
- ○ 75 x 75 Aluminium
- ⊗ 100 x 100 Galvanised Steel - Not Available
- ⊗ 125 x 125 White Cypress Timber - Not Available
- ⊗ 200 x 200 White Cypress Timber - Not Available

Fasteners
- ● Class 3/Galvanised
- ○ Stainless Steel

Corrosion Protection
- ● Zinc Primed Welds
- ○ Full Zinc Primer Coat

Colours

Powder Coat
Intensity Juicy Lime
Intensity Summer
Dark Violet

Timber
N/A

Plan and Concept © Adventure Playgrounds (NZ) Ltd 2025. This artwork is protected under Australian and NZ copyright laws.

adventure+ | motion+

S0404U Community Swing Frame - Metal - 2.5m Double
Equipment Illustration and Impact Area Plan

@ sales@adventureplus.net.au
1300 237 587
adventureplus.net.au