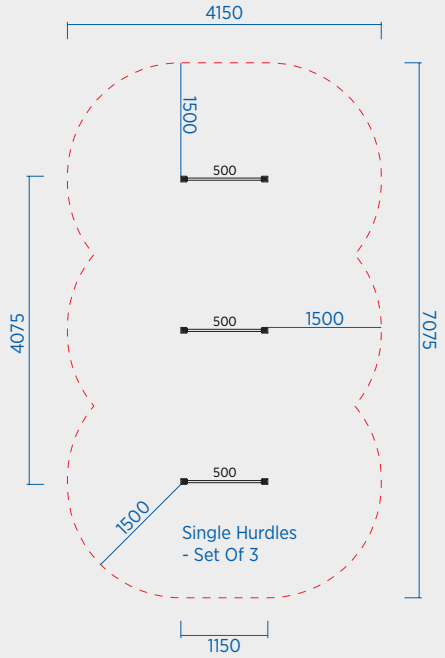

Plan and concept © Adventure Plus Solutions Pty Ltd 2025. Illustrations are schematic only, actual details may vary.

SCALE 1:100 0 1 2 3 4

- Provide undersurfacing in accordance with AS 4422 (Int.):2022. Mulch undersurfacing should be 200mm minimum compacted depth.
- Plans and illustrations are schematic only, actual details may vary. Do not scale for dimensions. Allow 5% minimum additional clearance for site variations.
- FHOF - Free Height Of Fall as per AS 4685:2021
- GC - Ground Clearance under swing attachments used to calculate impact area, free space and FHOF
- Falling Space:
  - Minimum impact area as per AS 4685:2021
  - Required free space as per AS 4685:2021
  - Recommended clearance area
  - Circulation space as per AS 4685:2021

Materials

Main Uprights
- ● Galvanised Steel
- ○ Aluminium
- ○ N/A

Platforms
- ○ Galvanised Steel
- ○ White Cypress Timber
- ○ Aluminum
- ● N/A

Shop Counter
- ○ HDPE
- ○ White Cypress Timber
- ○ Composite
- ● N/A

Wall Climber/Rock Wall /Scaling Wall
- ○ HDPE
- ○ White Cypress Timber
- ● N/A

Corrosion Protection
- ● Zinc Primed Welds
- ○ Full Zinc Primer Coat

Fasteners
- ● Class 3/Galvanised
- ○ Stainless Steel

Guardrails
- ○ Steel Pipe
- ○ Plastic Panels
- ○ Plastic Slat
- ○ White Cypress Timber
- ○ Perforated
- ○ Composite
- ○ Paling
- ○ Custom
- ● N/A

Colours

Powder Coat
Hawthorn Green
Intensity Leaf
Intensity Juicy Lime

Corrugated Sheet
N/A

Timber
N/A

HDPE Plastic
N/A

Wire Rope
N/A

Rotomoulded Plastic
N/A

adventure+ | spectrum+

S0750U Single Hurdles - Set Of 3
Equipment Illustration and Plan

@ sales@adventureplus.net.au
1300 237 587
adventureplus.net.au